



WATER



GAS



ENVIRONMENT



PEST CONTROL

## WASH HAND STATIONS

# SAVE WATER AND IMPROVE HYGIENE WITH INTELLIGENT DESIGN

Mechline's BaSiX range of basins is complemented by a choice of hands-free controls to improve water savings & hygiene. Choose from this convenient selection of taps and consider adding a soap dispenser to complete the hand-wash station.



### WS1 MODELS

## BASIX

ABS Polycarbonate basin dia.: O/D: 355 x 320 x 195 Bowl: 255 x 278 x 110 deep

Engineered from a single-piece, moulded high-grade polycarbonate ABS plastic, the WS1 is ergonomic, attractive, strong & durable with no sharp edges. **SaniTru® antimicrobial additive** embedded in the basin material resists mould, mildew & grime to provide a cleaner surface. Eco-friendly, the WS1 can be fully recycled & has lower embedded energy costs than traditional stainless steel basins. Fit with standard **CaterTap** basin taps or choose a "hands-free" option (models -KVS or -NT) to promote water savings & hygiene. **Designed & manufactured in the UK by Mechline.**

Complete with basin, drain boss, choice of tap or hands-free control (with manual mixing valve).




WS1-L



WS1-KVS

pictured with SPL-WS1

Grey basins are standard. Please clearly indicate "WHITE" after model ref. if preferred.

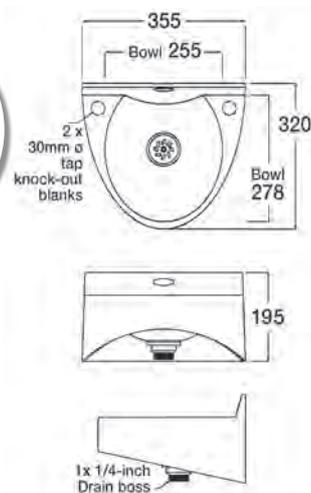

**SaniTRU®** Antimicrobial additive resists build up of mould, mildew and grime.

Model	Description
<b>Conventional Tap Options</b>	
WS1-X	with CROSS head taps
WS1-D	with DOME head taps
WS1-L	with 3" LEVER taps
<b>Hands Free Options</b>	
WS1-KVS	Knee-Operated, Hands-Free mechanical operation <i>Includes knee-valve, pre-mixer valve, swivel spout, water hose &amp; tap hole stopper</i>
WS1-NT	Battery-Operated, Hands-Free operation <i>Includes Delabie Tempomatic 3 tap, pre-mixer valve, water hose &amp; tap hole stopper</i>
WS1-NT4	Battery-Operated, Hands-Free operation <i>Includes Delabie Tempomatic 4 tap, pre-mixer valve, water hose &amp; tap hole stopper</i>

Model	Description
<b>Single/Monoblock Options</b>	
WS1-ML	with one, CaterTap, 3" LEVER tap and manual mixer
WS1-ML-T	with one, CaterTap, 3" LEVER tap and thermostatic mixer
WS1-MM	with Monoblock, single LEVER mixer tap
WS1-MT	with LEVER-operated, "auto shut-off" basin tap and manual mixer
WS1-MT-T	with LEVER-operated, "auto shut-off" basin tap and thermostatic mixer
<b>Further Options</b>	
SPL-WS1	Optional Splashback for WS1 models only, 245(H) x 342(W)
BSX-HSP	Optional Soap Dispenser



WATER



GAS



ENVIRONMENT



PEST CONTROL

## WASH HAND STATIONS

### WS2 MODELS

# BASIX


Stainless steel (304) basin dia.: O/D: 305 x 270 x 140

Bowl: 240 x 110 x 135 deep

Available with conventional taps; consider fitting with knee valve to convert to a complete "hands-free" system.



WS2-X



WS2-KVS



Complete with basin, drain boss, choice of tap or hands-free control (with manual mixing valve)

Model	Description
<b>Conventional Tap Options</b>	
WS2-X	with CROSS head taps
WS2-D	with DOME head taps
WS2-L	with 3" LEVER taps
<b>Hands Free Options</b>	
WS2-KVS	Knee-Operated, Hands-Free mechanical operation Includes knee-valve, pre-mixer valve, swivel spout, water hose & tap hole stopper
<b>Single/Monoblock Options</b>	
WS2-ML	with one, CaterTap, 3" LEVER tap and manual mixer
WS2-ML-T	with one, CaterTap, 3" LEVER tap and thermostatic mixer
WS2-MM	with Monoblock, LEVER single mixer tap
WS2-MT	with LEVER-operated, "auto shut-off" basin tap and manual mixer
WS2-MT-T	with LEVER-operated, "auto shut-off" basin tap and thermostatic mixer
<b>Further Options</b>	
BSX-HSP	Optional Soap Dispenser

### WS3 MODELS

# BASIX

Stainless steel (304) basin dia.: O/D: 300 x 320 x 195

Bowl: 260 dia. x 150 deep

Easy push-front panel for "hands-free" use or fit with a Delabie Tempomatic battery-operated tap.




WS3-KVS



WS3-NT

pictured with SPL-WS3



Complete with basin, drain boss, choice of tap or hands-free control (with manual mixing valve)

Model	Description
<b>Conventional Tap Options</b>	
WS3-X	with CROSS head taps
WS3-D	with DOME head taps
WS3-L	with 3" LEVER taps
<b>Hands Free Options</b>	
WS3-KVS	'Push-Front', Hands-Free mechanical operation Includes pre-mixer valve, water hose, swivel spout & tap hole stopper
WS3-KVS-WRAS	'Push-Front', Hands-Free mechanical operation Includes pre-mixer valve, water hose, swivel spout & tap hole stopper
WS3-NT	Battery-Operated, Hands-Free operation Includes Delabie Tempomatic 3 tap, pre-mixer valve, water hose & tap hole stopper
WS3-NT4	Battery-Operated, Hands-Free operation Includes Delabie Tempomatic 4 tap, pre-mixer valve, water hose & tap hole stopper
<b>Single/Monoblock Options</b>	
WS3-ML	with one, CaterTap, 3" LEVER tap and manual mixer
WS3-ML-T	with one, CaterTap, 3" LEVER tap and thermostatic mixer
WS3-MM	with Monoblock, LEVER single mixer tap
WS3-MT	with LEVER-operated, "auto shut-off" basin tap and manual mixer
WS3-MT-T	with LEVER-operated, "auto shut-off" basin tap and thermostatic mixer
<b>Further Options</b>	
SPL-WS3	Optional Splashback for WS3 models only, 315(H) x 300(W)
BSX-HSP	Optional Soap Dispenser



WATER



GAS



ENVIRONMENT



PEST CONTROL

## WASH HAND STATIONS

### WS4 MODELS

# BASIX

Stainless steel (304) basin dia.: O/D: 384 x 333 x 138

Bowl: 300 dia. x 138 deep

For "hands-free" convenience, can be fitted with knee valve or a Delabie Tempomatic battery-operated tap.



Complete with basin, drain boss, choice of tap or hands-free control (with manual mixing valve)

Model	Description
<b>Conventional Tap Options</b>	
WS4-X	with CROSS head taps
WS4-D	with DOME head taps
WS4-L	with 3" LEVER taps
<b>Hands Free Options</b>	
WS4-KVS	Knee-Operated, Hands-Free mechanical operation Includes knee-valve, pre-mixer valve, swivel spout, water hose & tap hole stopper
WS4-NT	Battery-Operated, Hands-Free operation Includes Delabie Tempomatic 3 tap, pre-mixer valve, water hose & tap hole stopper
WS4-NT4	Battery-Operated, Hands-Free operation Includes Delabie Tempomatic 4 tap, pre-mixer valve, water hose & tap hole stopper
<b>Single/Monoblock Options</b>	
WS4-ML	with one, CaterTap, 3" LEVER tap and manual mixer
WS4-ML-T	with one, CaterTap, 3" LEVER tap and thermostatic mixer
WS4-MM	with Monoblock, LEVER single mixer tap
WS4-MT	with LEVER-operated, "auto shut-off" basin tap and manual mixer
WS4-MT-T	with LEVER-operated, "auto shut-off" basin tap and thermostatic mixer
<b>Further Options</b>	
BSX-HSP	Optional Soap Dispenser


### WS6 MODELS

# BASIX

Stainless steel (304) basin dia.: O/D: 420 x 375 x 570

Bowl: 360 x 270 x 100 deep

Easy push-front panel for "hands-free" use or fit with a Delabie Tempomatic battery-operated tap.

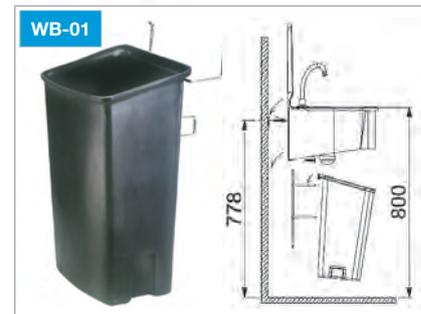

Complete with stainless steel basin, drain boss, integral splashback, hands-free control and manual mixing valve.

Model	Description
<b>Hands Free Options</b>	
WS6-KVS	'Push-Front', Hands-Free mechanical operation Includes pre-mixer valve, water hose, swivel spout & tap hole stopper
WS6-KVS-WRAS	'Push-Front', Hands-Free mechanical operation Includes pre-mixer valve, water hose, swivel spout & tap hole stopper
WS6-NT	Battery-Operated, Hands-Free operation Includes pre-mixer valve, water hose, swivel spout & tap hole stopper
WS6-NT4	Battery-Operated, Hands-Free operation Includes Delabie Tempomatic 4 tap, pre-mixer valve, water hose & tap hole stopper
<b>Further Options</b>	
WB-01	Optional Waste Bin, (for WS6 basin only)



WATER



GAS



ENVIRONMENT



PEST CONTROL

## UTILITY SINKS

### JANITORIAL SINKS

**BASIX**

Hand-wash bowl: 430 (max) x 280 x 130 deep  
Mop bowl: 400 x 400 x 200 deep



Model	Description
<b>Janitorial Sinks</b>	
BSXJTS600	Janitorial Sink "600" - (600mm deep)
BSXJTS700	Janitorial Sink "700" - (700mm deep)
<b>*Available separately</b>	
BSX-TAP-MONO	Janitorial sink monoblock mixer tap - 26mm Ø tap hole

### MOP SINK

**BASIX**

Dims: 600 x 500 x 560-620 adjustable height  
Mop bowl: 400 x 400 x 200 deep



Model	Description
<b>Mop Sink</b>	
BSXMS600	Mop Sink
<b>Optional extras (sold individually)</b>	
BSX-500WX-SO	1/2" Cross Head Bib Tap with 80mm long stand offs
500BTBP	1/2" Bib Tap Elbow (chrome)

## CATERCONNEX

**A RANGE OF WRAS APPROVED BRAIDED & FOOD SERVICE WATER HOSES FOR VARIOUS APPLICATIONS. INCLUDING THE INDUSTRY RECOGNISED FOOD-GRADE HOSES, PEX AQUAVEND DRINKING WATER HOSES.**



See pages 71-76 for details



WATER



GAS




ENVIRONMENT



PEST CONTROL

## FIXTURES, FITTINGS & ACCESSORIES

### KNEE/FOOT VALVES



WRAS APPROVED PRODUCT

#### Knee-Operated Valve

Model	Description
DLB-734-100	Angle wall feed
DLB-735-400	Straight in-line
M-RUB-KV	Straight in-line (not WRAS)

NB: Straight knee-valve comes as standard on hand-wash stations fitted with knee-valves.



#### Mix Foot

Model	Description
DLB-739-100	Floor mounted
DLB-739-102	Wall mounted



#### Mono Foot

Model	Description
DLB-736-101	Floor mounted
DLB-736-102	Wall mounted

### MIXER VALVES



#### Thermostatic Mixer Valve

Model	Size
DLB-733-015	1/2-inch
DLB-733-020	3/4-inch



#### Manual Mixer - compact

Model	Description
DLB-200-000	1/2-inch

Compact Manual Mixer comes as standard on KVS hand-wash stations, except WS6 models.



#### Manual Mixer - compact

Model	Description
M-MX91	MF1/2-inch



WRAS APPROVED PRODUCT

#### 15mm Mini Thermostatic Blending Valve

Model	Size
WNT-MIX	15mm

BASIX

### TIMEFLOW VALVES



#### Timeflow Valve for WS3 Basin

Model	Description
M-TPO91-INOX	for WS3 basin



#### Timeflow Valve for WS6 Basin

Model	Description
DLB-748-126	for WS6 basin

BASIX



WATER



GAS



ENVIRONMENT



PEST CONTROL


## FIXTURES, FITTINGS & ACCESSORIES

### SOAP DISPENSERS

### DELABIE

Liquid soaps with a viscosity between 500 to 800 centipoises/MPSA are best.

### BASIX

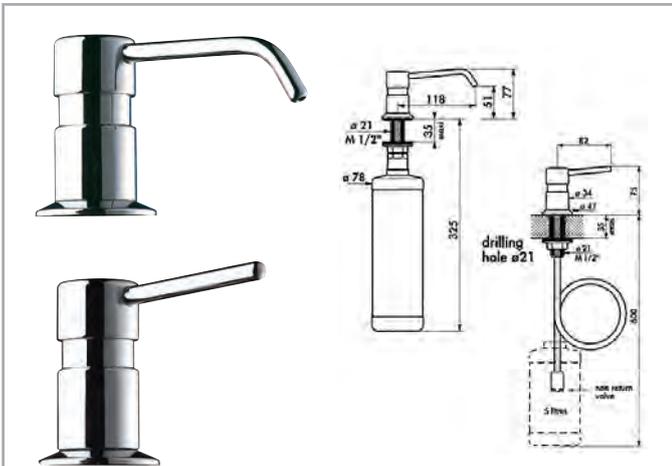

#### Push-button Deck Mounted Soap Dispenser

Chrome plated body. Allen screw fitting prevents vandalism. Filled up from the top (by unscrewing the upper part) or from the lower part (by unscrewing the bottle).

Model	Description
DLB-729-012	with 1 litre bottle, ELBOW spout, L. 120mm
DLB-729-008	with 1 litre bottle, STRAIGHT spout, L. 80mm
DLB-729-108	with nylon pipe 1.20 metre for remote tank, STRAIGHT spout, L. 80mm
DLB-729-508	with 0.5 litre bottle, STRAIGHT spout, L. 80mm height under washbasin 210mm

#### Deck Mounted Soap Dispenser


Model	Spout size
Deck Mounted:	
BSX-HSP	Hand pump - basin fitted, 350ml capacity, drill hose size = 25mm



#### Wall Mounted Soap Dispenser

Model	Spout size
BSX-ASD	Hygienic automatic "hands free" unit - battery operated*
BSX-BSP	Basic push-button, 600ml capacity

\*NB: When installing model BSX-ASD over stainless steel or near reflective surfaces - be aware that the unit may self-activate and dispense soap on it's own.

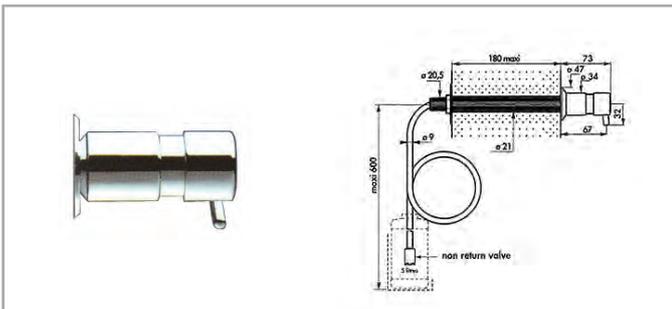

#### Push-button Wall Mounted Soap Dispenser

Through the wall soap dispenser for remote soap-tin (tin not included). Chrome plated push button, with flexible pipe 6/8 L. 1.20 m.

Model	Description
Wall Mounted:	
DLB-729-150	for wall 150mm thick

## AQUAJET

COMPREHENSIVE RANGE OF WRAS APPROVED TAPS MANUFACTURED TO MEET THE RIGOURS OF COMMERCIAL CATERING.



See pages 29-51 for details



WATER



GAS



ENVIRONMENT



PEST CONTROL

## FIXTURES, FITTINGS & ACCESSORIES

### SPOUTS

WRAS APPROVED PRODUCT



#### Chrome-plated Solid Brass Fixed Spout

Model	Description
DLB-981-148	L 140, H 120, with vandal proof aerator
DLB-981-142	L 140, H 120, WRAS-approved

#### Swan Neck Swivel Spout

Model	Description
DLB-967-152	L 150, H 150
DLB-967-202	L 200, H 200

NB: Swivel spout comes as standard on hand-wash stations fitted with knee-valves.

### BASIX




#### Chrome-plated, Brass Spout

Model	Description
DLB-204-001	Fixed Spout, dia. 16 mm, L 150, H 170
DLB-220-000	Swivel Spout, dia. 16 mm, L 150, H 140

#### Swan Neck Swivel Spout, Chrome-plated

Model	Description
M-CDC90	L 150, H 170

### MISCELLANEOUS

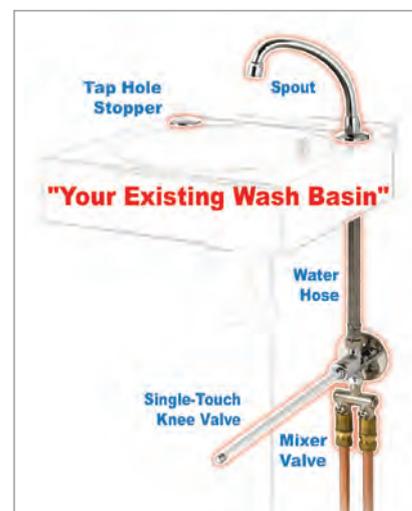

#### Hands-Free Conversion Kit - for Existing Wash Hand Basins

Consider making your existing basin a hands-free station.

Includes: knee valve, spout, blending mixer valve, water hose & tap hole stopper. (Basin sold separately).

OPTION: Can be supplied with Thermostatic mixing valve as an option. Contact Mechline for more information.

Model
HANDSFREE-EZ

#### Tap Hole Stopper

Model
THS


### STAINLESS STEEL

### BASIX

#### "Gastronorm"/Oven Grids

Durable stainless steel, designed to fit most cooker formats.

Model	Description
BSX-GN1/1-2	1 strutt, 20 rungs, (325x530mm)
BSX-GN2/1-3	3 strutts, 20 rungs, (650x530mm)
BSX-OG64-2	2 strutts, 29 rungs, (600x400mm)

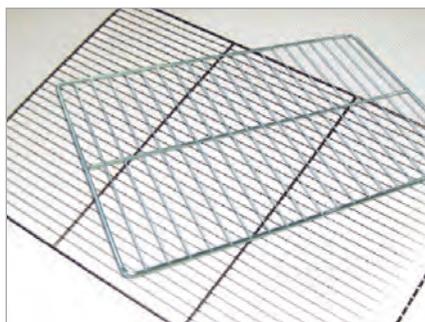

## QUICKLINK

**MOBILISATION SYSTEMS FOR SINKS & DISHTABLING. MAKE IT EASIER THAN EVER TO GET BEHIND YOUR CATERING EQUIPMENT!**



See pages 77-81 for details